

FLOOR DOOR


Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
1 2 3 4	3		*	2000	2100	*	Panoramic	Transparent	Door Hold Open latch
	1		*	2000	2100	*	Panoramic	Transparent	** -Hold Opewn latch

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

* Alluminium anodized + RAL 9005 - smooth - semipolished

** CISA lock con pomo interno

Side A

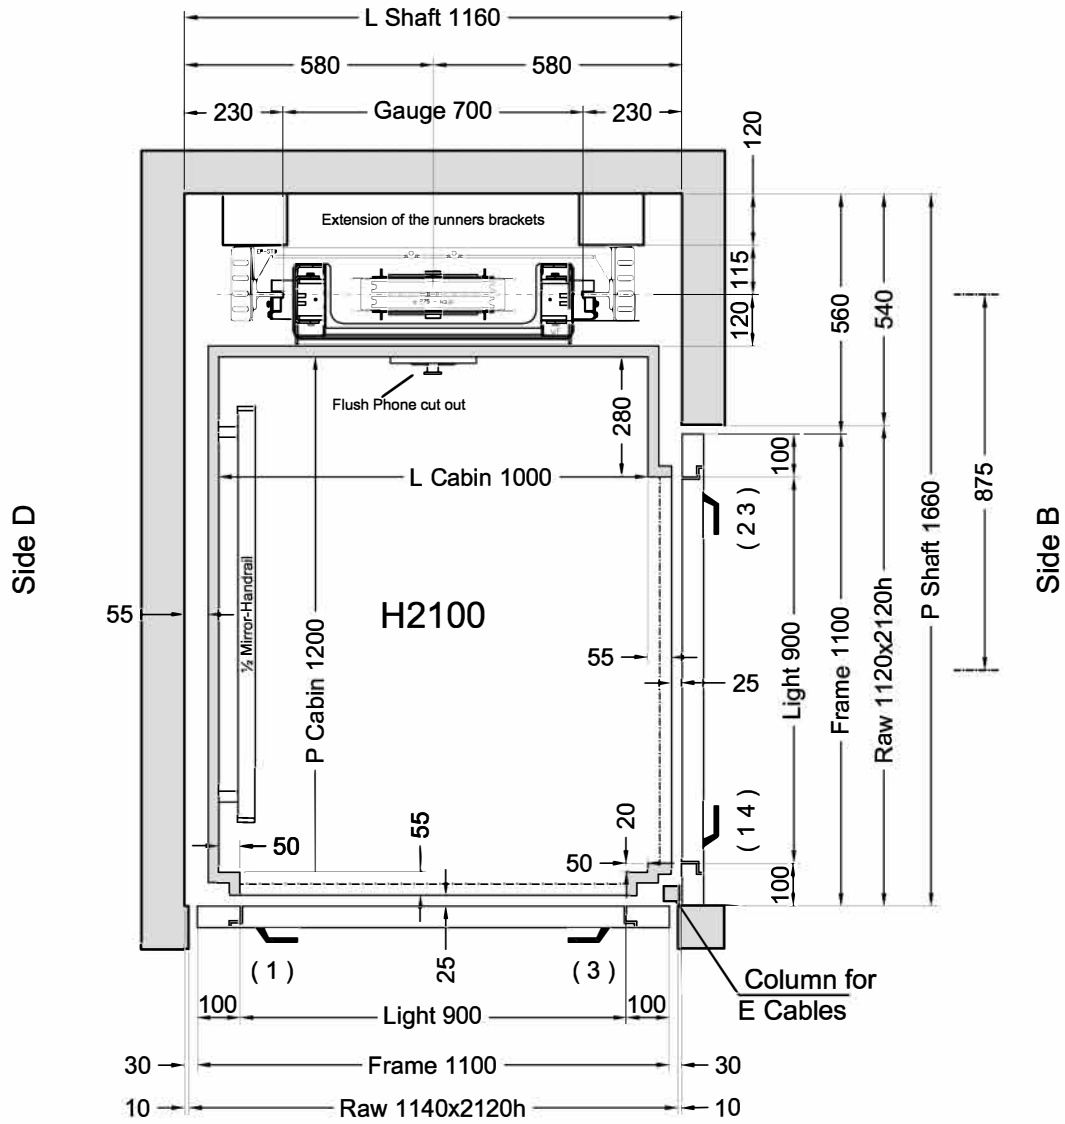


Side C

Customer own flooring: Dimensions **1025 (L) x 1225 (P)** thks **20 mm** Weight: **50 kg**

Stops: 4 - Doors: 6

Shaft in **Masonry (Muratura)**

ORDER	VERSIONS	Description	Designer	Date	Final Drawings	
ORDER NUMBER					Model	SHEET
					ELFO	1/2
		modifiche varie	D.Ogliastro	18/10/2016		SHEET DIMENS.
			Final Drawings D.Ogliastro	1° STESURA 20/10/16		A3
			CAPACITY	AREA m²	CAPACITY	
			300 Kg	1,2		

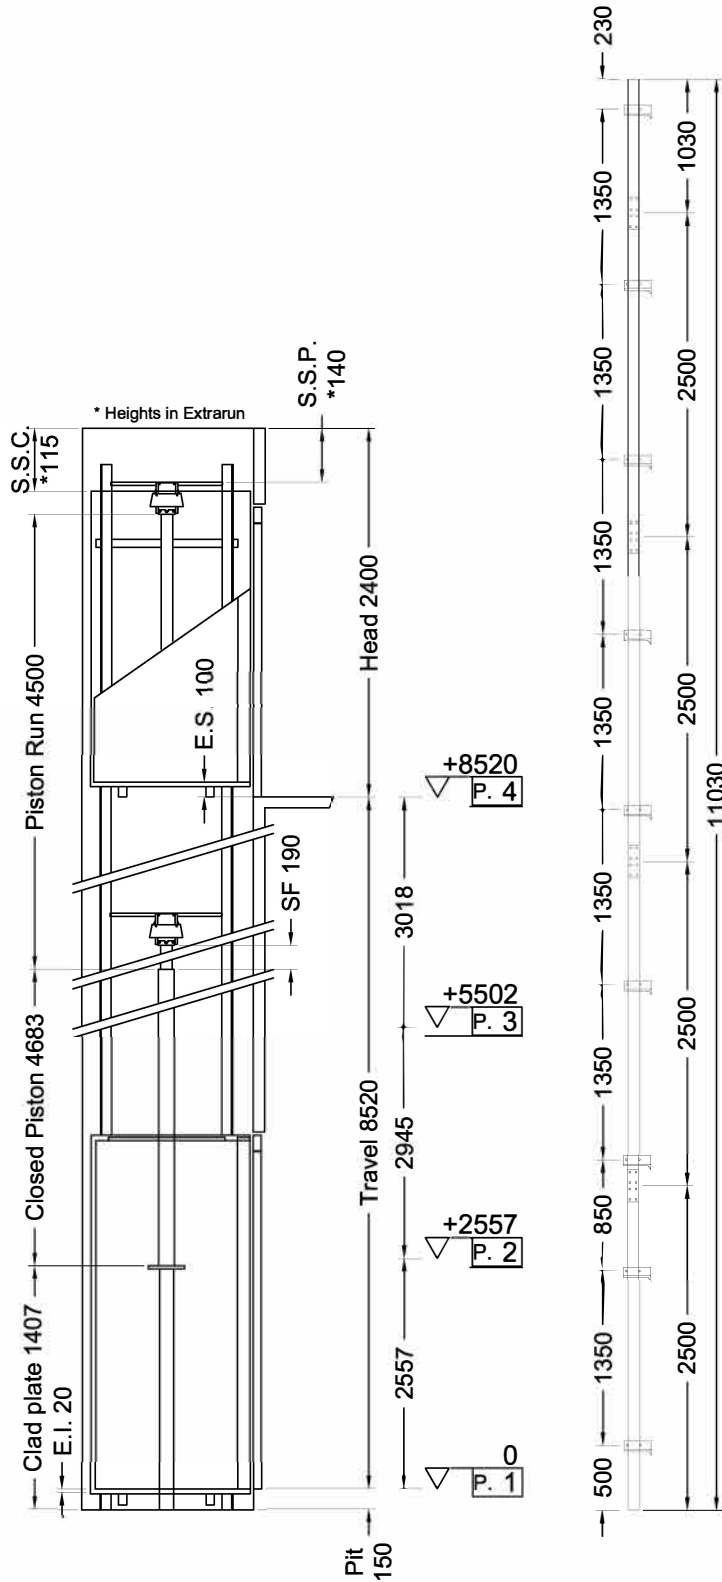

Indirect Installation		Speed 0,3 m/s	20/10/16 13.32 (V.2930) ^{EN}
THRUST DURING NORMAL OPERATION		THRUST OF SAFETY DEVICE INTERVENT.	
P	(N) 10588	P	(N) 746
N	(N) 1052	N	(N) 7364
F1	(N) 1572	F1	(N) 2619
F2	(N) 236	F2	(N) 393
SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm) 20	Max static pressure	(bar) 35,14
E.S.	Extrarun above cabin (mm) 100	Min static pressure	(bar) 19,84
SF.	Piston extraction (mm) 190	Overpressure limit	(bar) 49,19
S.S.P.	Piston/head (mm) 140	Residual pressure	(bar) 1,94
S.S.C.	Cabin/head (mm) 115		
HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	GMV HL 3010 (-*)	Guide rails	70x70x9
Capacity (l/min)	35	Brackets	(Nr) 9
Motor (V)	TF400V	Ropes	Ø 9 mm 6-(1+9+9)
Power (Kw)	2,9	Cables length (mm) 2 x	14000
Nominal current (A)	11	Min actual breaking load (N)	47300
Piston	OMARLIFT HC (Ø)70x5x4500		
Opt. oil position	BASSO		
Tubing	3/4" EN 853 1SN - FD 3/4" - FD M30X2		
Tubing length (mm)	11000		
Min hydraulic oil (L)	55		
SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	PFB	BP1	TÜV AFV515
Block Valve	OMARLIFT	HC-34	TÜV 44 208 07 352266 004
Key Locks	Prudhomme	PLT/L/CPX NL 11-400-1002-125-02	
MACHINERY LOCATION			
At floor	1	Length of the hose travel	7000 (mm)
Cables enter in shaft: Side	A		
CABIN	CABIN ACCESSORIES		
Panels	Blu Stellato B41SMM	½ Mirror	Lati D
Finishes	Inox BA mecc.	Handrail	INOX LUCIDO, Lati D
Oper. panel	VERTICAL	Outside covering	Side B,C,Roof
Floor	By Customer	Outside finishing	Inox BA mecc.
Ceiling	DAMA - Bianco A32PP		
OTHER ACCESSORIES			
Automatic Control 2011			
Two speed			
Return to the lower floor after adjustable time			
False head device			
Handles CASPIM (Long)			
Flush Phone cut out on cop			
Cabinet: Blu Stellato B41SMM			
Full height infra-red curtain V2			
Power supply 400V 3 phase			
Roof covering			
ICARO display in cabin on COP			
Call Accept Emergency manual descent from cabin			
Enabling key for the cabin button pad, double insertion			
Guides dimension 2.5 m			
Blue Buttons			



ORDER
96654-Brisbane

ORDER NUMBER

CLIENT
Lift Shop

PLACE OF INSTALLATION

Final Drawings
D.Ogliastro

Final Drawings

SCALE
OUT OF SCALE

1° STESURA
20/10/16

SHEET
2/2