


SUPERMEC • MASONRY SHAFT • DRIVE TO RIGHT ADJACENT THROUGH CAR • CUSTOM CABIN / SHAFT

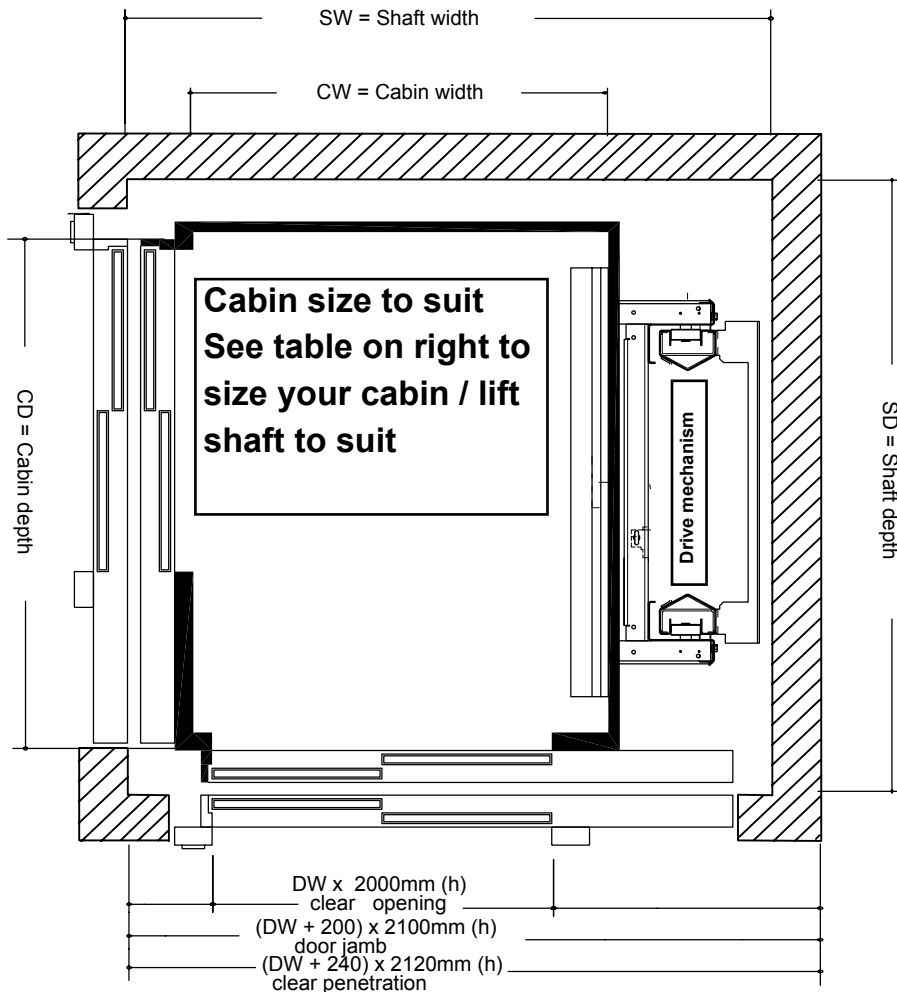

NOT FOR CONSTRUCTION

NOT REQUIRED

Unistruts
 Landing Control Penetrations (unless fire-rated doors)

Doors options and sizes are flexible and varied.
 Please discuss with your lift designer.

SIZE FORMULAS

$CW + 700 = SW$
 $CD + 400 = SD$

This layout drawing is for guidance only.
 Please contact our trained and experienced lift designers to ensure your complete understanding of your lift requirements.
 We look forward to your call.

CONSTRUCTION DETAILS

- Construction Material re-inforced concrete or filled masonry
- Internal shaft size Size to suit
- Pit depth 250mm
- Headroom 2800mm
- Machine cabinet Machine Room-less
- Power supply single phase, 240v
- Doors sizes from 600mm - 1000mm wide
- Doors Penetrations different jambs may have alternate impact

STANDARD SPECIFICATIONS

- Person capacity 480kg (6-7 persons)
- Speed 0.30 m/s
- Maximum Travel 12000mm
- Safety Protection 180 beams full height sensor
- Maximum floors 6
- Compliance AS1735.18 / AS1735.16
- Cabin fit out from our huge range of options
- Doors finishes from our huge range of options