


## SUPERMEC • STEEL SHAFT • DRIVE TO LEFT ADJACENT THROUGH CAR • CUSTOM CABIN / SHAFT

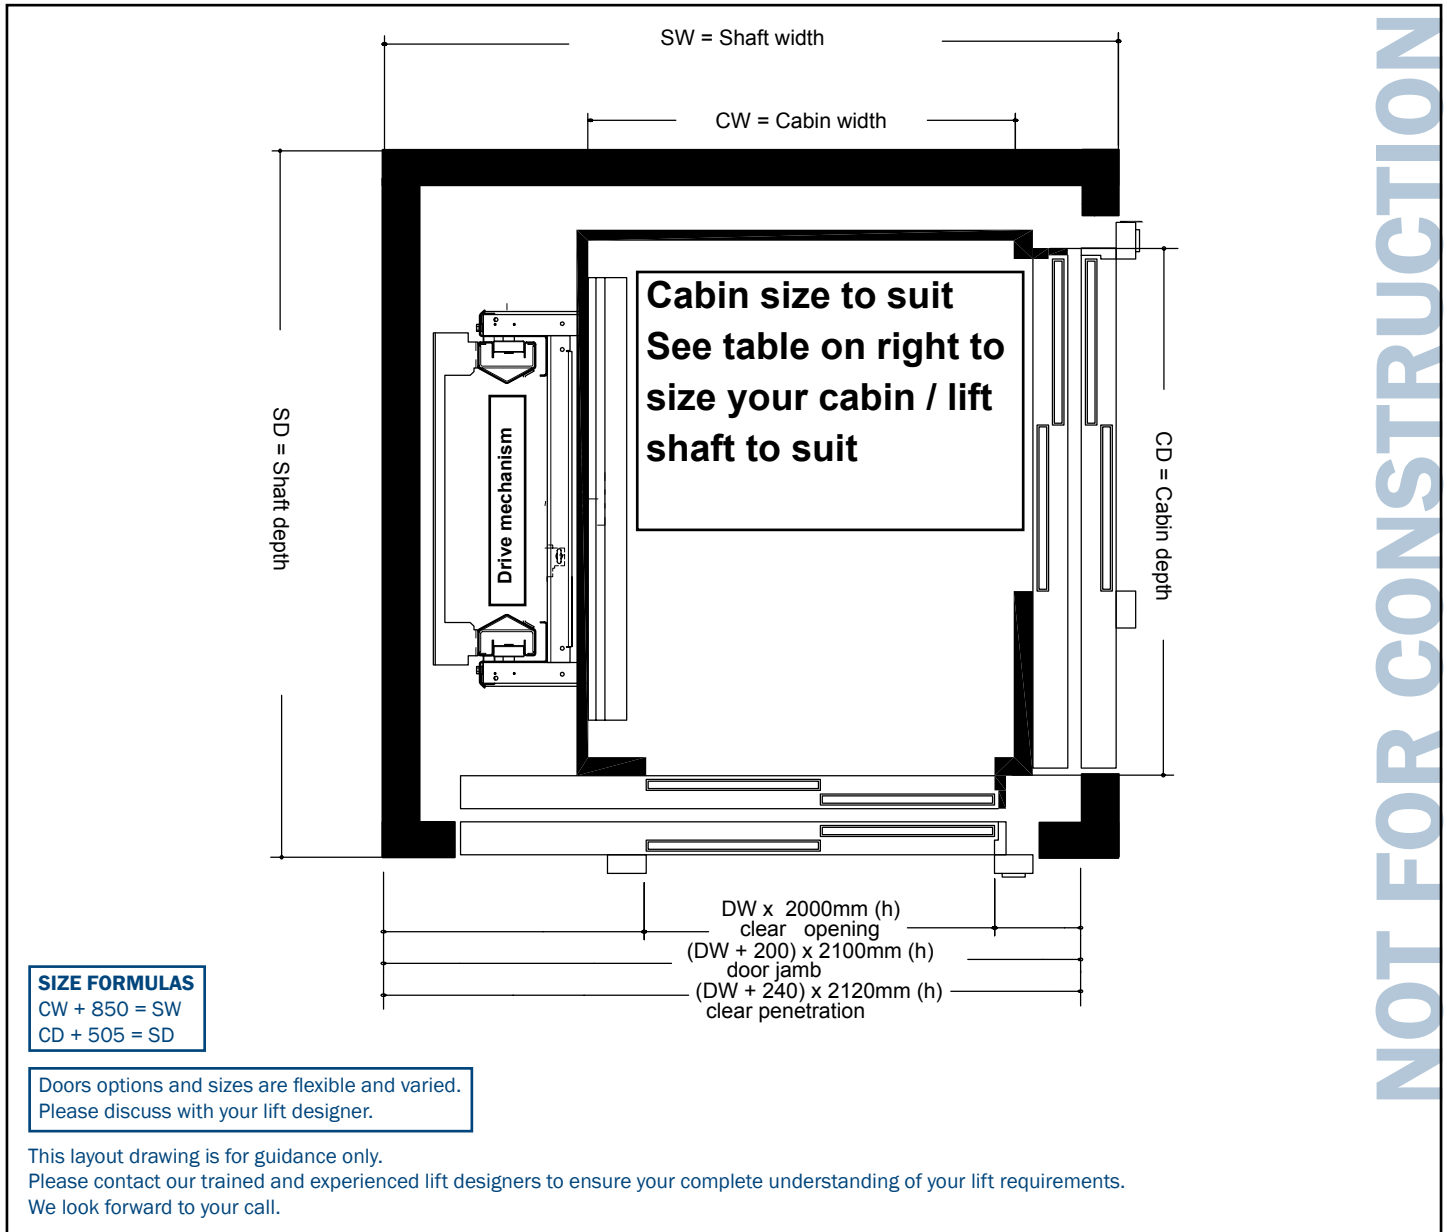

**SIZE FORMULAS**  
 CW + 850 = SW  
 CD + 505 = SD

Doors options and sizes are flexible and varied.  
 Please discuss with your lift designer.

This layout drawing is for guidance only.  
 Please contact our trained and experienced lift designers to ensure your complete understanding of your lift requirements.  
 We look forward to your call.

CONSTRUCTION DETAILS	
• Construction Material	Steel Shaft
• External shaft size	Size to suit
• Pit depth	250mm
• Headroom	2800mm
• Machine cabinet	Machine Room-less
• Power supply	single phase, 240v
• Doors sizes	from 600mm - 1000mm wide
• Doors frames	different jambs may have alternate impact

STANDARD SPECIFICATIONS	
• Person capacity	480kg (6-7 persons)
• Speed	0.30 m/s
• Maximum Travel	12000mm
• Safety Protection	180 beams full height sensor
• Maximum floors	6
• Compliance	AS1735.18 / AS1735.16
• Cabin fit out	from our huge range of options
• Doors finishes	from our huge range of options