


## FLOOR DOOR

Side B	Side C	Side D	VERSION	H LIGHT	H FRAME	FRAME	WINDOW	GLASS	ACCESSORIES
	G 1 2		Aluminium Anodized	2000	2100	Anodized aluminium	Panoramic	White Milk	C2

C1 = Enabling key for the floor button pad (single insertion) C2 = Enabling key for the floor button pad (double insertion) PM = Button pad on the wall PE = Outside lock and button pad

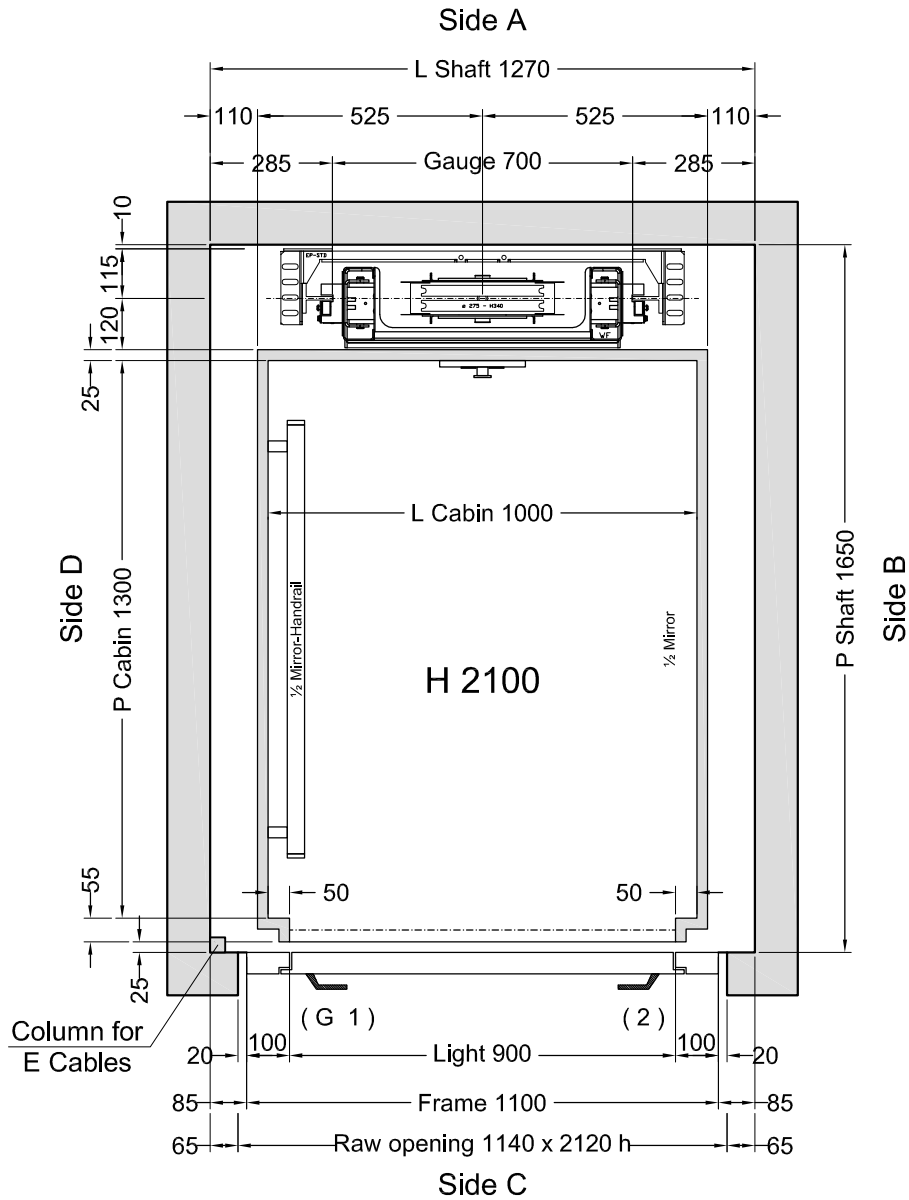

Cabina  
Classica




**Stops: 3 - Doors: 3**

Shaft in **Reinforced concrete (C.A.)**

Customer own flooring: Dimensions **1000 (L) x 1325 (P)** thks **20 mm** Weight: **50 kg**

			Designer	Date	<b>Final Drawings</b>	
					Model <b>ELFO</b>	SHEET 1/2
			L. Del Bianco	13/06/2016		SHEET DIMENS. <b>A3</b>
		Final Drawings D.Tomei	1° STESURA 17/06/16	SCALE 1:12,5		
		CAPACITY <b>300 kg</b>	AREA m <sup>2</sup> <b>1,3</b>	CAPACITY		

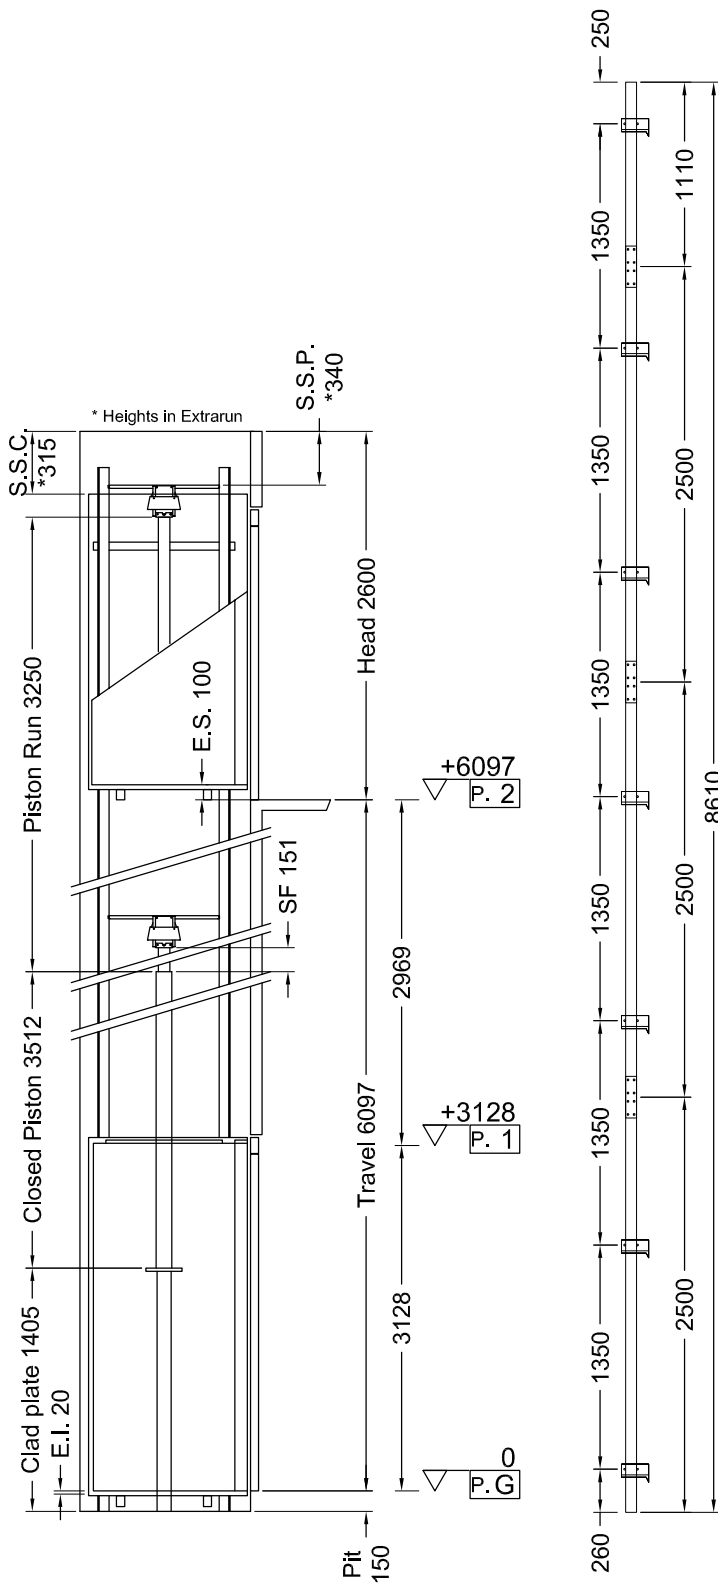

**Indirect Installation**      Speed **0,3 m/s**      17/06/16 15.09 (V.2891)

THRUST DURING NORMAL OPERATION			THRUST OF SAFETY DEVICE INTERVENT.		
P	(N)	<b>10975</b>	P	(N)	648
N	(N)	<b>820</b>	N	(N)	7489
F1	(N)	<b>1774</b>	F1	(N)	2957
F2	(N)	<b>250</b>	F2	(N)	416

SPACES		PRESSURES	
E.I.	Extrarun below cabin (mm)	Max static pressure (bar)	<b>35,35</b>
E.S.	Extrarun above cabin (mm)	Min static pressure (bar)	<b>20,05</b>
SF.	Piston extraction (mm)	Overpressure limit (bar)	<b>49,49</b>
S.S.P.	Piston/head (mm)	Residual pressure (bar)	<b>1,68</b>
S.S.C.	Cabin/head (mm)		

HYDRAULIC UNIT		MECHANICAL PARTS	
Central unit	<b>GMV HL 3010 (-*)</b>	Guide rails	<b>70x70x9</b>
Capacity (l/min)	<b>35</b>	Brackets	(Nr) <b>7</b>
Motor (V)	<b>MF230V</b>	Ropes	$\varnothing$ <b>9 mm 6-(1+9+9)</b>
Power (Kw)	<b>2,9</b>	Cables length (mm) 2 x	<b>12000</b>
Nominal current (A)	<b>27</b>	Min actual breaking load (N)	<b>47300</b>
Piston	<b>Start Home</b> ( $\varnothing$ ) <b>70x5x3250</b>		
Opt. oil position	<b>BASSO</b>		
Tubing	<b>3/4" EN 853 1SN - FD 3/4" - GOMITO 3/4"</b>		
Tubing length (mm)	<b>11000</b>		
Min hydraulic oil (L)	<b>48</b>		

SECURITY DEVICES	Manufacturer	Model	Certificate
Safety Gear	<b>PFB</b>	<b>BP1</b>	<b>TÜV AFV515</b>
Block Valve	<b>START ELEVATOR</b>	<b>1/2" 0327</b>	<b>CA50.00525</b>
Key Locks	<b>Prudhomme</b>	<b>PLT/L/CPX NL 11-400-1002-125-02</b>	

MACHINERY LOCATION			
At floor	<b>G</b>	Length of the hose travel	<b>7000 (mm)</b>
Cables enter in shaft: Side	<b>A</b>		

CABIN		CABIN ACCESSORIES	
Panels	<b>Antracite N4</b>	1/2 Mirror	<b>Side B, D</b>
Finishes	<b>Inox BA mecc.</b>	Handrail	<b>Inox Lucido, Side D</b>
Oper. panel	<b>VERTICAL (Like finishes)</b>		
Floor	<b>By Customer</b>		
Ceiling	<b>LABIRINT - SlimInox F12PPS</b>		

- OTHER ACCESSORIES**
- Enabling key for the cabin button pad, double insertion
  - Guides dimension 2.5 m
  - Manual pump
  - Manostat with overweight signal
  - Two speed
  - Handles CASPIM (Long)
  - Telephone by Lift Shop
  - Full height Infra-red curtain V2
  - Automatic Control 2011
  - Call Accept - Emergency manual descent from cabin
  - Blue Buttons
  - Cabin Buttons: "G, 1, 2"

